



INPUT BANDPASS FILTERS

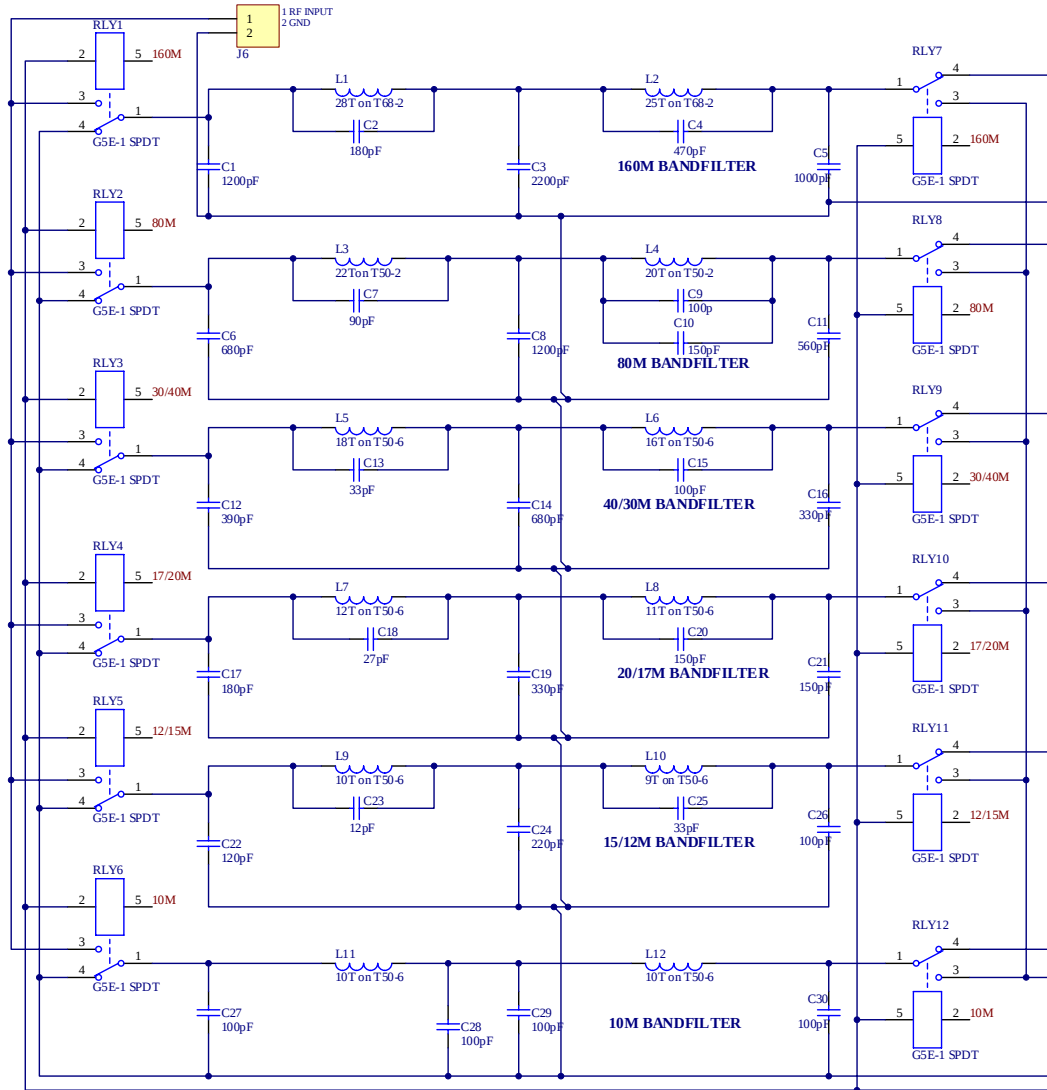

I.C. IN

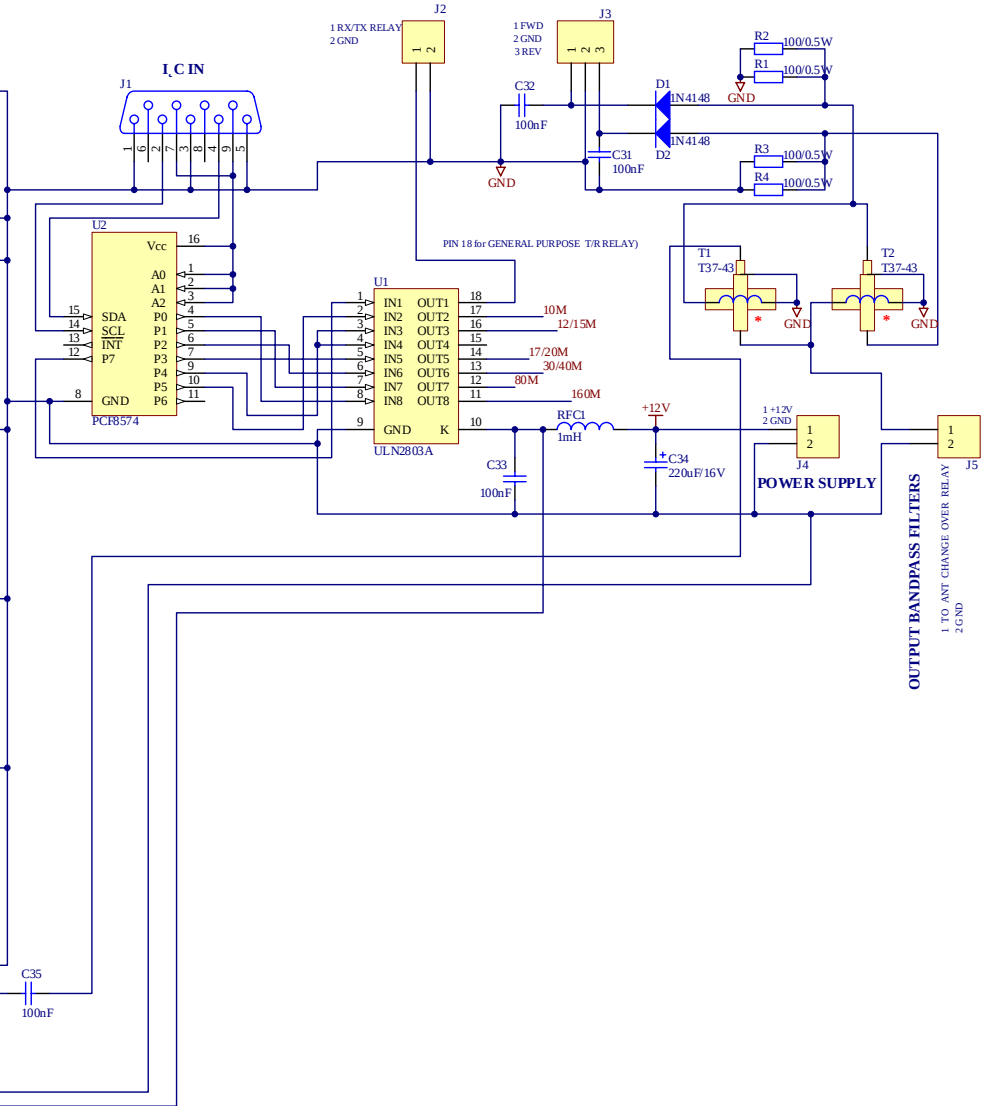

FORWARD/REVERSE POWER READING

POWER SUPPLY

OUTPUT BANDPASS FILTERS

* T1/T2 are formed by passing a length of RG174 coax through a T37-43 toroid core wound with 12 turns to form the secondary. Ground one end of the coax braid as shown.

Title		
LOW PASS FILTERS BOARD		
Size	Number	Revision
A3		
Date	2006-02-17	Sheet of
File	D:\PCB\...LOW-PASS.schDoc	Drawn By: